


RESIDENTIAL & COMMERCIAL IRRIGATION Built on Innovation®

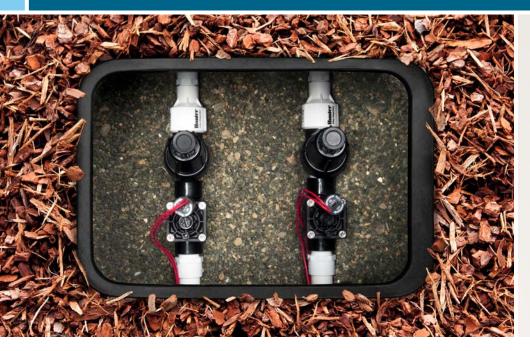

- **O1 Durable:** Highest quality components are built to last in tough conditions
- **O2 Convenient:** All-in-one preassembled kit
- **Reliable:** Commercial-grade components are factory assembled and water tested

PCZ AND ACZ DRIP CONTROL ZONE KITS

Durable and Convenient Control Zone Kits Designed for Residential Applications

PGZ/ACZ Drip Control Zone Kits: These pre-assembled kits bring together the popular PGV valve with both a filter and a pressure regulator, providing you with a complete control zone. The PGV valve features high-grade material construction, including a bonnet made of reinforced glass-filled nylon. The kit also includes a stainless steel filter screen, flush cap, and pressure regulator to maintain a consistent 25 or 40 PSI. To save both time and labor, use the ACZ kit to meet your anti-siphon needs.

DRIP CONTROL ZONE KITS FEATURES & SPECIFICATIONS

Features

- Factory-assembled and water-tested
- Highest quality components (stainless steel filter screen, standard flush cap, top-of-the-line regulator)
- Wide flow range to cover most micro irrigation applications
- Warranty period: 2 years
- Most robust pressure-regulating filter available

Specifications

ACZ-075:

- Pressure regulation: 25 or 40 PSI
- Operating pressure: 20 to 120 PSI
- Operating temperature: up to 120°F
- 150 mesh stainless steel screen
- ¾" outlet

PCZ-101:

- Pressure regulation: 25 or 40 PSI
- Operating pressure: 20 to 120 PSI
- Operating temperature: up to 120°F

HFR-075 = 3/4" NPT filter system and 3/4" outlet **HFR-100-075** = 1" NPT filter system and $\frac{3}{4}$ " outlet

- 150 mesh stainless steel screen
- 3/4" outlet

AC7-101:

- Pressure regulation: 25 or 40 PSI
- Flow: 0.5 to 15 GPM (30 to 900 GPH) Flow: 0.5 to 15 GPM (30 to 900 GPH)
 - Operating pressure: 20 to 120 PSI
 - Operating temperature: up to 120°F
 - 150 mesh stainless steel screen
 - ¾" outlet

HFR Filter Regulator:

- Pressure regulation: 25 or 40 PSI
- Flow: 0.5 to 15 GPM (30 to 900 GPH) Flow: 0.5 to 15 GPM (30 to 900 GPH)
 - Operating pressure: 20 to 120 PSI
 - Operating temperature: up to 120°F
 - 150 mesh stainless steel screen
 - HFR-100-075: 1" inlet x 3/4" outlet
 - HFR-075: 3/4" inlet x 3/4" outlet

Model

ACZ-075

Height: 141/4" Width: 11" Depth: 3"

34" inlet x 34" outlet



ACZ-101

Height: 141/4" Width: 11" Depth: 3"

1" inlet x 34" outlet



PCZ-101

Height: 6" Width: 13" Depth: 3"

1" inlet x 3/4" outlet




HFR-100-075-25 HFR-100-075-40

Height: 7" Width: 61/2" Depth: 3" 1" inlet x ¾"outlet



HFR-075-25 HFR-075-40

Height: 7" Width: 61/2" Depth: 3" 34" inlet x 34" outlet



DRIP CONTROL ZONE KITS - SPECIFICATION BUILDER: ORDER 1 + 2

Website hunterindustries.com | Customer Support 1-800-383-4747 | Technical Service 1-760-591-7383

Helping our customers succeed is what drives us. While our passion for innovation and engineering is built into everything we do, it is our commitment to exceptional support that we hope will keep you in the Hunter family of customers for years to come.

