




200

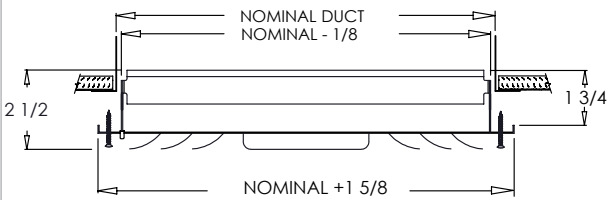

200

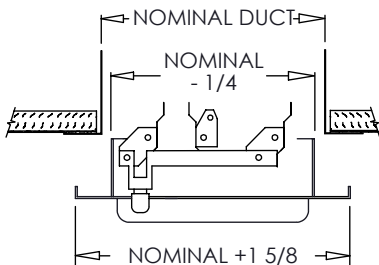

200-O

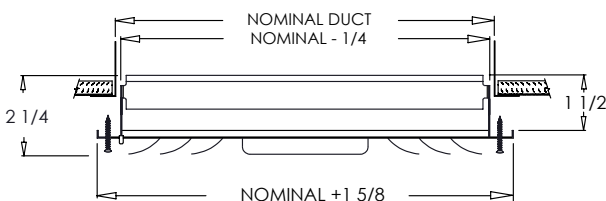

200-O

Standard Features:

- Stamped curved blades provide uniform air distribution across ceiling or walls
- Three air patterns available
- Lever operated multi-shutter damper
- All component parts, rivets, linkage, and handle enclosed in valve to assure trouble-free operation
- Countersunk mounting holes with color matching Phillips Posidriv screws
- Rust resistant pre-coat with durable powder finish
- Soft White

Options:

- Lever operated Opposed Blade Damper (200-0)
- Tool operated Opposed Blade Damper (TO-200-0)
- 2" ADC compliant round collar with bead for ease of installation (available in square sizes only) (200-NLC)
- T-20 Tamper Proof Screws

Air Patterns:

- 201H
- 203
- 204

Finishes:


STANDARD COLORS

- Soft White
- Driftwood Tan

DESIGNER COLORS


- Black
- Bronze
- Storm Gray
- Cement Gray

- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White

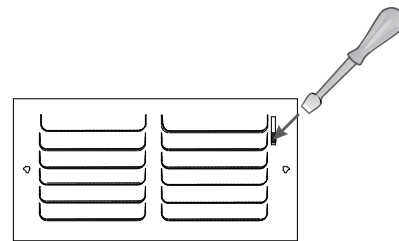


TO-200-O


Air Patterns:



201 H



203



204

Additional Information:

Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	