


DOMESTIC HOT WATER AQUASTAT


The Wilo Aquastat is made to be used in conjunction with the Wilo Z 15+ Hot Water recirculation pump. The Aquastat comes with a 6-foot cord and ensures the faucets in the system are receiving hot water temperatures between 98°F - 115°F.

Installation Steps:

1. Remove Aquastat from bag.
2. Clip Aquastat onto ½” or ¾” hot water return piping.
3. Plug the Aquastat into a 115V wall outlet.
4. Plug the Z 15+ pump cord into the female end of the Aquastat cord (see reference diagram on right).
5. Installation is now complete.

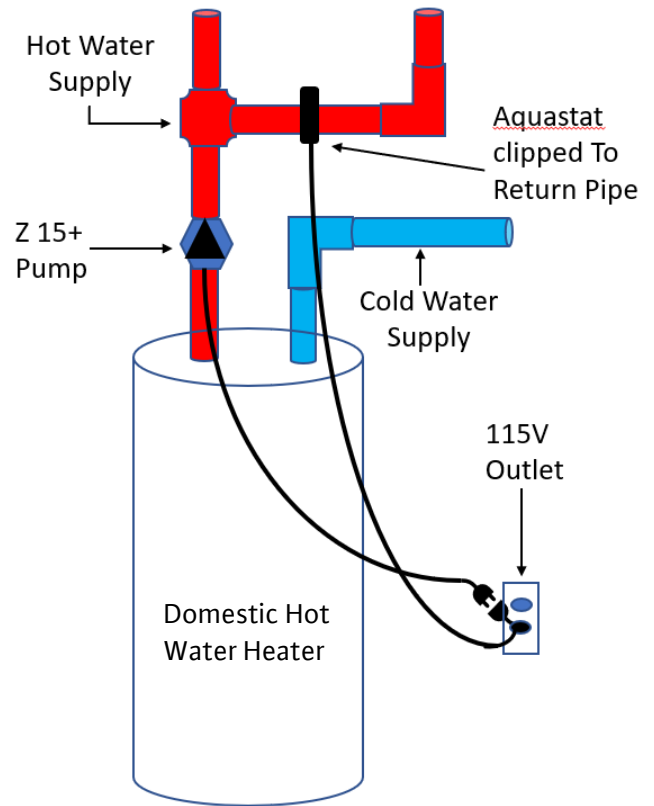

INTERNAL WIRING DIAGRAM

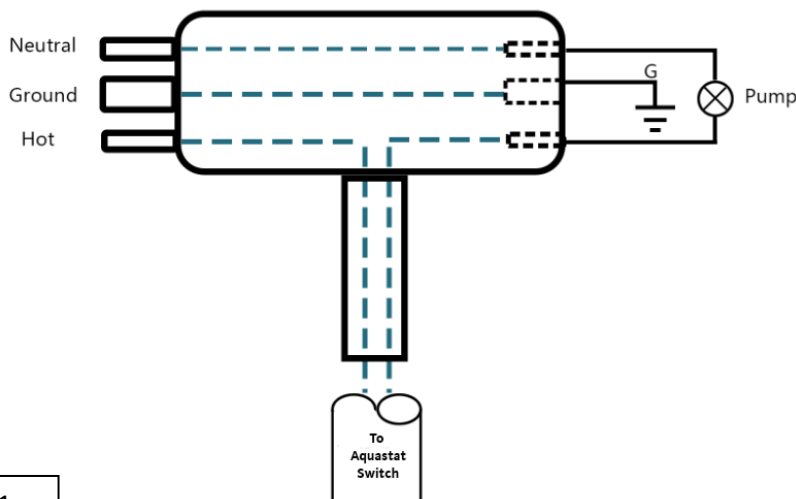

08052022 – REV. 1