
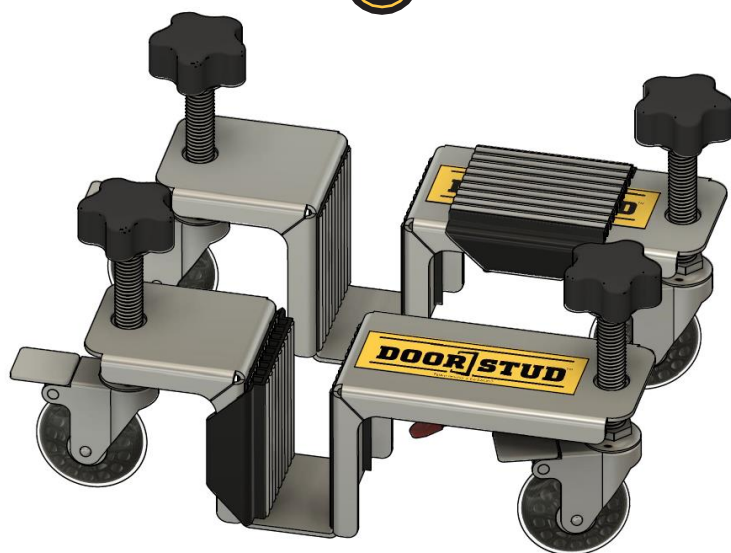
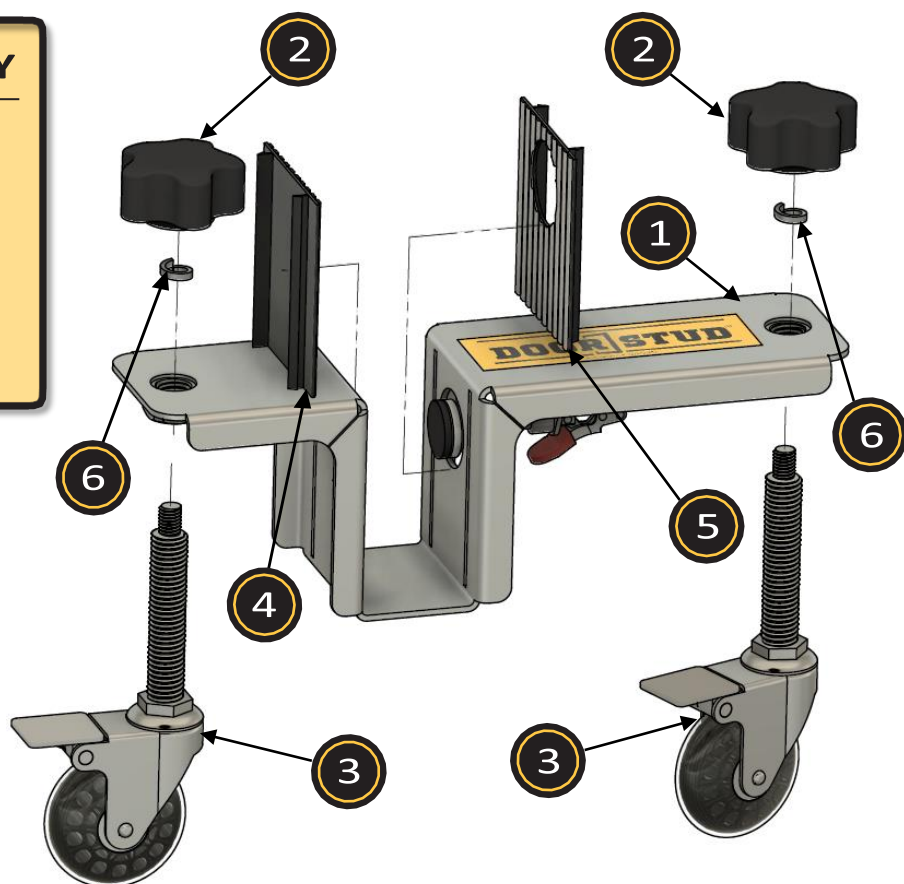


# DOOR STUD<sup>®</sup>

## SUPPLIED COMPONENTS

## QTY

- |                                |   |
|--------------------------------|---|
| 1. Stud Flange Assembly        | 2 |
| 2. Adjustment Handles          | 4 |
| 3. Caster Wheels               | 4 |
| 4. Protection Pad              | 2 |
| 5. Protection Pad with Cut-out | 2 |
| 6. Lock Washer                 | 4 |
| 7. Spacer Clip                 | 2 |

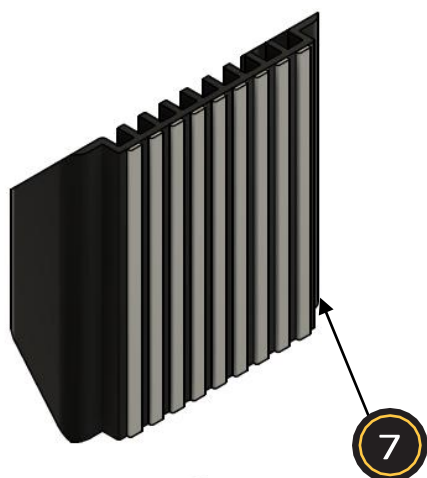

The Door Stud is compatible with both 1 3/8" and 1 3/4" panels. For 1 3/8" panels, use the supplied Spacer Clips. Clips can be stored on top of the Door Stud when not in use for 1 3/4" panels.

# Installation Instructions

For video demonstration and warranty information, see  
[thedoorstud.com](http://thedoorstud.com)

With the door on its side, fasten each Door Stud to the bottom of the door panel. Toggle clamp adjustment may be required.



Bring the door to the desired position by adjusting the Door Stud handles simultaneously, two at a time. Roll the door into position to complete the installation.



When installation is complete, open the door panel and raise each wheel away from the floor. Unclamp each Door Stud and slide out from under the panel to complete the process.

