


# **Product Specification**

Model: AT-LFP-12-100CV01


Version 1.1

Description: 12V 100Ah Slimline LiFePO $_4$  battery

15 June, 2020

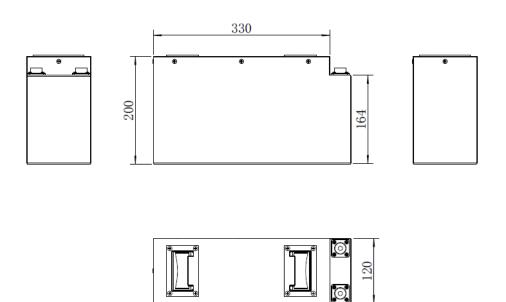

370



#### Introduction

**AMPTRON**® Portable Lithium Batteries are a **Plug and Play** replacement for any application currently using a deep cycle Gel, AGM or Flooded Lead Acid battery. Our Lithium batteries have an integrated Battery Protection System (BPS) and are designed to handle superior tolerances. The BPS maximizes the performance of the battery by automatically balancing the cells and protecting them from being over charged or over discharged. Our integrated BPS design is what allows our batteries to be used as an AR "Alternative Replacement" for any application requiring high quality, dependable and lightweight Lithium Batteries.

### **Heavy Duty - Built in Battery Protection System**

AMPTRON® lithium batteries have a built-in Battery Protection System (BPS) designed to prevent damage to the cells from almost any external accidental occurrence that would normally cause damage. The internal Battery Protection System (BPS) will automatically disconnect to prevent damage to the cells if any cell drains below 2.5 volts. It will automatically reconnect when the charger is turned on. This protects the battery from over-discharging and damaging the cells. This technology also protects the battery from overcharge, short circuit and reverse polarity.

#### Internal Features:

- Low Voltage Protection Switch Automatically disconnects around 10V
- Over Voltage Protection Switch Automatically disconnects around 14.8V
- Short Circuit Protection Switch Automatically disconnects
- Reverse Polarity Protection Switch Automatically disconnects
- Internal cell balancing Automatically balances cells.
- Charge Balancing Independent balancing for multiple batteries connected in parallel or in series.

This Battery Protection System is designed to last throughout the life of the battery and provide reliable power for thousands of cycles.

#### **CELL BALANCING**

The BMS balances the cells by sending more current through the length way circuit boards and into cells with a lower voltage. The BMS will also discharge cells that exceed 3.65V during charging.

THERMAL FUSE

Internal Cell Safety Fuse

Our latest cell technology is manufactured with an internal thermal safety fuse between the anode and cathode that will break and disconnect in the unlikely event the cell would begin to overheat.

#### **ELECTROLYTE**

Flame Retardant Electrolyte

Our cells are manufactured with our patented flame-retardant additive in our electrolyte.

#### **EXPLOSION PROOF**

Explosion proof Nickel plated steel

Every AMPTRON® cell is manufactured in our explosion proof Nickel plated steel cylindrical case.

#### **Cells**

The cells are the heart of a Lithium battery. The battery pack uses our very high-quality A-grade prismatic cells that has a high discharge current rating and excellent cycle life performance. These cells are capable of producing a continuous discharge current of 3C (300% of its rated capacity in Amps) and a huge peak discharge of 5 C (500% of its rated capacity in Amps) for 10 seconds.

#### Amptron prismatic cells







### **Data Sheet**

Item	Specification	Description/Remark
Model	AT-LFP-12-100CV01	12V 100Ah Slimline LiFePO <sub>4</sub> battery
Chemistry	Lithium Iron Phosphate (LiFePO <sub>4</sub> )	
Battery dimensions	370 x 120 x 200mm	LxWxH
Weight	About 12.9kg	
Cell type	3.2V 50Ah Prismatic cells	
Battery module	8 pcs 3.2V 50Ah cells, 2 in parallel, 4 in series	
Standard capacity ( 0.2C5A)	100Ah / 1280Wh	
Cycle life	≥2000 cycles @ 100% DoD	Test conditions at 25°C, 1C / 1C charge and discharge rate. Higher cycle life can be achieved at lesser charge and discharge rates.
Rated voltage	12.8V	Working voltage per cell: 3.2V
Max. charge voltage	14.6V	Maximum charge voltage per cell: 3.65V
Cut-off voltage	11.5V to 10V	Cut-off is triggered when the lowest cell reaches 2.5V
Depth of Discharge (DoD)	100%	Batteries can be discharged to 100% of the rated capacity.
Standard charge current range	25A	0.25C
Charging time	About 4 hours	When charging from low voltage cut-off point
Rapid charging	Max. charge current 100A (1C₃A)	Temperature increase falling within 15°C is normal. Over 15°C will affect the service life of the cells.
Max continuous discharge current	100A	1C
Peak discharge current	200A	2C (5 seconds)
Discharge performance in	20A (0.2C <sub>3</sub> A) ≥ 100%	
normal temperature	1C <sub>3</sub> A ≥90%	
Operating temperatures	Standard 0°C~45°C Discharge -20°C~65°C Storage -20°C~45°C	
Impedance (Max, at 1000Hz.)	≤ 45mΩ	
Storage performance	Capacity can be kept ≥ 80% in storage for 12months	Battery should be kept at $-20^{\circ}$ C $\sim$ 45°C where it's dry, clean and well-ventilated.

# **So Why Consider Changing to Lithium Technology**



Super Energy Density, more usable energy in less space



Lighter, more compact & portable





Longer life-cycle & cost efficient






Environmentally friendly & more energy efficient



Built to service higher loads



Delivers stable Voltage



Faster to charge

### **Some Frequently Asked Questions**

#### Q> Are Lithium batteries safe?

Lithium Iron Phosphate (LiFePO<sub>4</sub>) batteries are the safest type of Lithium batteries as they will not overheat, and even if punctured they will not catch on fire. The cathode material in LiFePO<sub>4</sub> batteries is not hazardous, and so poses no negative health hazards or environmental hazards. Due to the oxygen being bonded tightly to the molecule, there is no danger of the battery erupting into flames like there is with Lithium-Ion. The chemistry is so stable that LiFePO<sub>4</sub> batteries will accept a charge from a Lead Acid configured charger.

Q> Can I use AMPTRON® LiFePO<sub>4</sub> batteries as a replacement for Lead Acid batteries?

AMPTRON® Lithium LiFePO<sub>4</sub> batteries are a Plug and Play replacement for any application currently using deep cycle Gel, AGM or Flooded Lead Acid batteries.

Q> What is the life expectancy of a Lithium battery?

The typical estimated life of the AMPTRON® Lithium Iron Phosphate (LiFePO<sub>4</sub>) battery is 5-15 years, or 2000 to 5000 charge cycles.

Q> Do Lithium batteries have a memory?

Unlike NiCad batteries, Lithium LiFePO<sub>4</sub> batteries do not have a charge memory. That means carefully controlled deep-discharge cycles are not required, and partial-discharge cycles has no negative effect on the batteries.

Q> Why are Lithium Iron Phosphate LiFePO<sub>4</sub> batteries better?

LiFePO<sub>4</sub> (also known as Lithium Iron Phosphate) batteries are a huge improvement over Lead Acid batteries in weight, capacity and life cycles. The LiFePO<sub>4</sub> batteries are the safest type of Lithium batteries as they will not overheat, and even if punctured they will not catch on fire. The stability of the chemistry also gives these batteries exceptionally long life.

Q> When should I charge my Lithium battery?

Lithium Iron Phosphate (LiFePO<sub>4</sub>) batteries can be left or cycled in a partially discharged state for long periods with few or no adverse effects, such as sulphation. AMPTRON® lithium batteries have a built-in Battery Protection System (BPS), that will automatically disconnect when the low voltage cut-off is reached, protecting the batteries from excessive discharge. These batteries also do not have a charge memory. All of this means that the batteries can be charged at any point. However, to maximize the battery life, it is recommended to recharge the batteries when they reach 20% State of Charge or higher.

# Comparison with deep cycle Lead Acid (Flooded, AGM, Gel) batteries

The table below summarises the comparisons between AMPTRON®'s Lithium Iron Phosphate (LiFePO<sub>4</sub>) batteries vs. Lead Acid batteries:

Category	AMPTRON® LiFePO <sub>4</sub> batter	ries	Lead Aci	d (Flooded, AGM, Gel) batteries
Cycle life	2000-5000	Cycle	life	400-800
		Full Discha	Full	
	Lithium			Lead acid
	The expected lifespan of ar lifespan of Lead Acid batte		LiFePO <sub>4</sub> I	pattery is 4 to 10 times the
	Expected life of >2000 at re 100% Depth of Discharge ( and up to 5000 cycles at 80 The typical estimated life of AMPTRON® Lithium Iron Phosphate (LiFePO <sub>4</sub> ) batter years, or 2000 to 5000 char- cycles	(DoD), 0% DoD. of the ry is 7-15	have a li Depth o	ked-after AGM batteries might fe of 400 to 800 cycles at 50% f Discharge (DoD). Other lead tery types are generally less.


Category	AMPTRON® LiFePO <sub>4</sub> batteries	Lead Acid (Flooded, AGM, Gel) batteries
	Battery is full	Battery is empty
Depth of Discharge (DoD)		
	Depth of discharge: 0% 20%	40% 60% 80% 100%
	An Amptron LiFePO <sub>4</sub> battery will typic a deep cycle Lead Acid battery of the	cally provide twice the usable energy than same rated capacity.
	You can safely go down to 100% DoD of the rated capacity and still expect >2000 cycles. 100Ah of rated capacity yields the full 100Ah useable capacity – at least 2 times the useable capacity of an AGM.	It is generally accepted that the most economic and practical DoD for an AGM battery is 50% (the "50%" rule). Other lead Acid battery types have an even lesser practical DoD. 100Ah of AGM gives you 50Ah useable under the 50% discharge rule – at most 50% of the

	usable capacity of the 100Ah
	AMPTRON® LiFePO <sub>4</sub> battery.

Category	AMPTRON® LiFePO <sub>4</sub> batteries	Lead Acid (Flooded, AGM, Gel) batteries
Weight	Lithium	(GEL/AGM/Flooded)
	An Amptron LiFePO <sub>4</sub> battery provide Acid battery of the same weight.	s 4 times the usable energy than a Lead
	Usable amp-hour for amp-hour, is about $^1\!/_4$ the weight of lead-Acid batteries. This ratio reduces further under heavy loads.	Usable amp-hour for amp-hour, is about 4 x the weight. This ratio increases further under heavy loads.

Category	AMPTRON® LiFePO <sub>4</sub> batteries	Lead Acid (Flooded, AGM, Gel) batteries
Voltage Drop	Reading may indicate only 20% left  Heavy outflow (load)  Constant heavy loads do not significantly impact the voltage of Amptron LiFePO <sub>4</sub> batteries, wheras the voltage of Lead Acid batteries significantly drops.  Minimal voltage drop under load. If a battery is at 13.3 volts and you pull a high current out of it, the voltage will still retain 13.3 volts  Voltage drops significantly under load. Impacts are that lights can dim, appliance start cycles may get interrupted due to a voltage drop, or appliances may run inefficiently.	

	while delivering the current demand.	
Category	AMPTRON® LiFePO <sub>4</sub> batteries	Lead Acid (Flooded, AGM, Gel) batteries
Peukerts effect (The impact of current on the usable amp-hours)	Discharge Continue Co	tent Curve  ttent discharge  Lious discharge  Effective Cell Capacity  5 7 8 9 10 11 12 13 charge Time
	Under heavy loads, the usable capacity of a Lead Acid battery is diminished, whereas the effect on the Amptron LiFePO <sub>4</sub> battery is negligible.	
	The AMPTRON® LiFePO <sub>4</sub> battery has a negligible effect in normal use.	The higher the current the fewer the amp-hours the battery will deliver. This effect progressively deteriorates as the battery ages. For example, a Lead Acid battery with a C20 capacity of 100Ah, will deliver 5 amps for 20 hours (5h x 20A = 100Ah). However, it will not deliver 50 amps for 2 hours (50A x 2h = 100Ah) or 100 amps for one hour. In effect, the higher current reduces the usable amp hours.

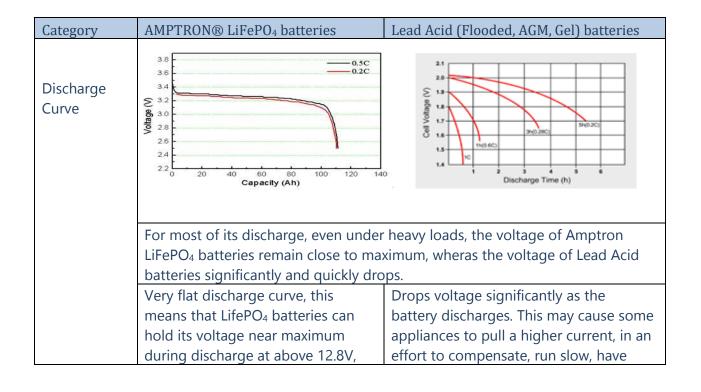

until the battery reaches about	lack of power, may not work effectively
95% DoD.	or even stop functioning early before
	the usable energy is consumed.

Category	AMPTRON® LiFePO <sub>4</sub> batteries	Lead Acid (Flooded, AGM, Gel) batteries
Charge time and charge rate		
	Amptron LiFePO <sub>4</sub> batteries charge me	uch faster than Lead Acid batteries.
	<ol> <li>Tolerates a higher bulk charge rate than most deep-cycle Lead Acid batteries. The recommended charge rate for maximum cycle life is 0.5C i.e. 50A for a 100Ah battery, but can be charged up to 1C i.e. 100A for a 100Ah battery.</li> <li>Can consume full charge until the batteries get to 14.6 volts, followed by about 20 minutes at that voltage for cell balancing (not capacity) and then float. Batteries are fully charged up to four hours earlier compared to Lead Acid batteries</li> </ol>	<ol> <li>The recommended charge rate for large size AGM batteries is 0.2C, i.e. 20A for a 100Ah battery. Higher charge rates will heat up the battery and due to internal resistance, the absorption voltage will be reached when the battery is charged at only 60% or less, this resulting in a longer absorption time required to fully charge the battery. High rate charging will therefore not substantially reduce the charging time of a Lead Acid technology battery.</li> <li>Typically needs some hours at a constant voltage with tapering current to charge the last 20% (40% of usable capacity).</li> </ol>

Category	AMPTRON® LiFePO <sub>4</sub> batteries	Lead Acid (Flooded, AGM, Gel) batteries	
Charge Efficiency	EFFICIENCY DE LA CONTRACTION D		
	Amptron LiFePO <sub>4</sub> batteries use less energy to fully charge than Lead Acid batteries of the same raged capacity.		
	Higher charge efficiency (>95%). That means to get 100Ah into the battery it might only require about 105Ah or less. This means less wastage of valuable solar energy, less generator run-time, and quicker time-to-full charge.	Lower charge efficiency (<75%). That means to get 100Ah into the battery will require >125Ah of charge.	

